
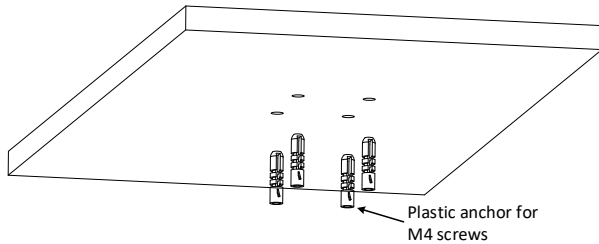


Antenna Mounting Kit


MT-ND-EY

UL-94-V0 rated, Hard Ceiling Mount for
IXL-EYN-H2P, IXL-EYN-H3P


Installation Instruction

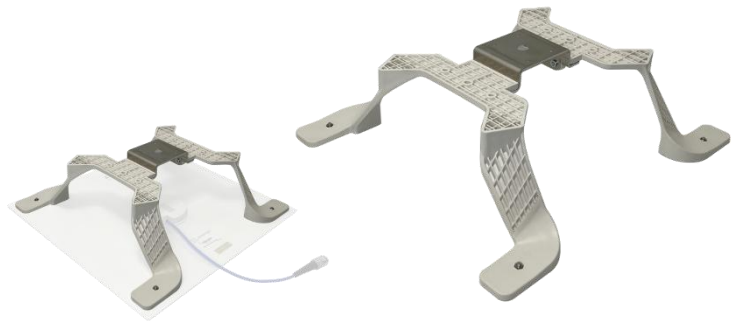


Step 1:
Drill four mounting holes on the ceiling according to the plastic anchor installation requirements, and determine where to put plastic anchor(for M4) on the ceiling.

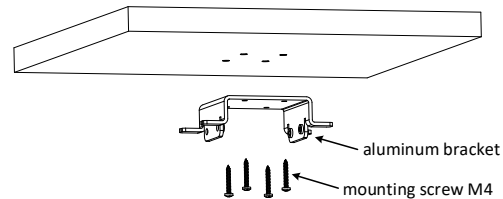


Step 2:
M4x25 screws are used to attach the aluminum bracket on the ceiling.

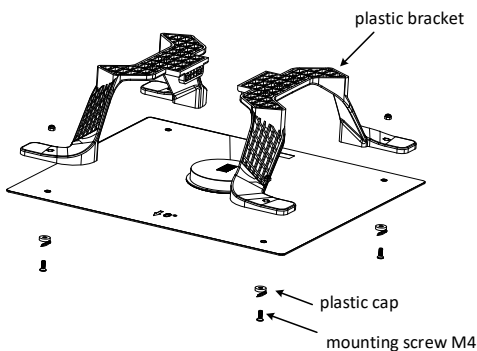


Step 3:
Assemble the plastic bracket to the back of the antenna.

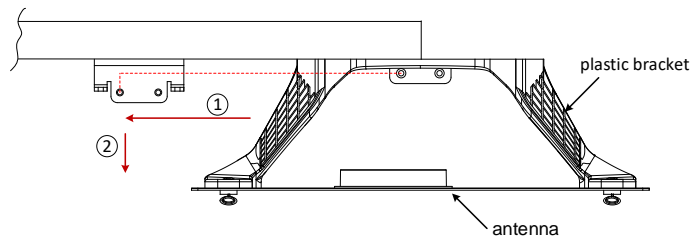

Step 4:
Slide the antenna assembly into the aluminum bracket as shown in the drawing and push it down to align the mounting holes



Side view

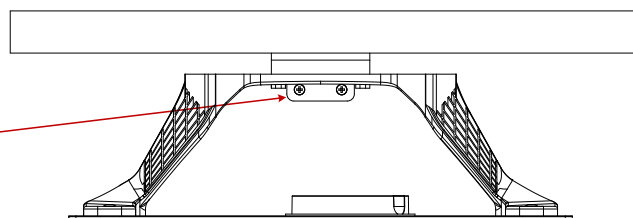

Step 5:
Fasten the screws on both sides to complete the installation.

Packing List

Item	Parts	Qty
1	Identical plastic bracket	2
2	Aluminum bracket	3
3	Screws for aluminum bracket mounting on metal ceiling	4
4	Screws for aluminum bracket/plastic bracket	4
5	Screws including caps for antenna & plastic bracket	4
6	Nuts for antenna/ plastic bracket	4
7	Packing box	1

Mechanical Specification

Dimension Diameter, height (in/mm)	13.27x5.71x3.98 / 337.0x145.0x101.0
Weight (lb./kg)	0.84 / 0.38
Shipping Dimension(in/mm)	15.75x6.10x4.53 / 400.0x155.0x 115.0
Shipping Weight(lb./kg)	1.21 / 0.55
Flammability	UL-94-V0